Tr1-1 2SB400B1

Tr2-2 2SB303B

JIS A2

MODEL MR - 151S CIRCUIT DIAGRAM

Tr1-3 2SB303F　　Tr1-4 2SB186B Y　　Tr1-5, Tr1-6 2SB272Y x 2

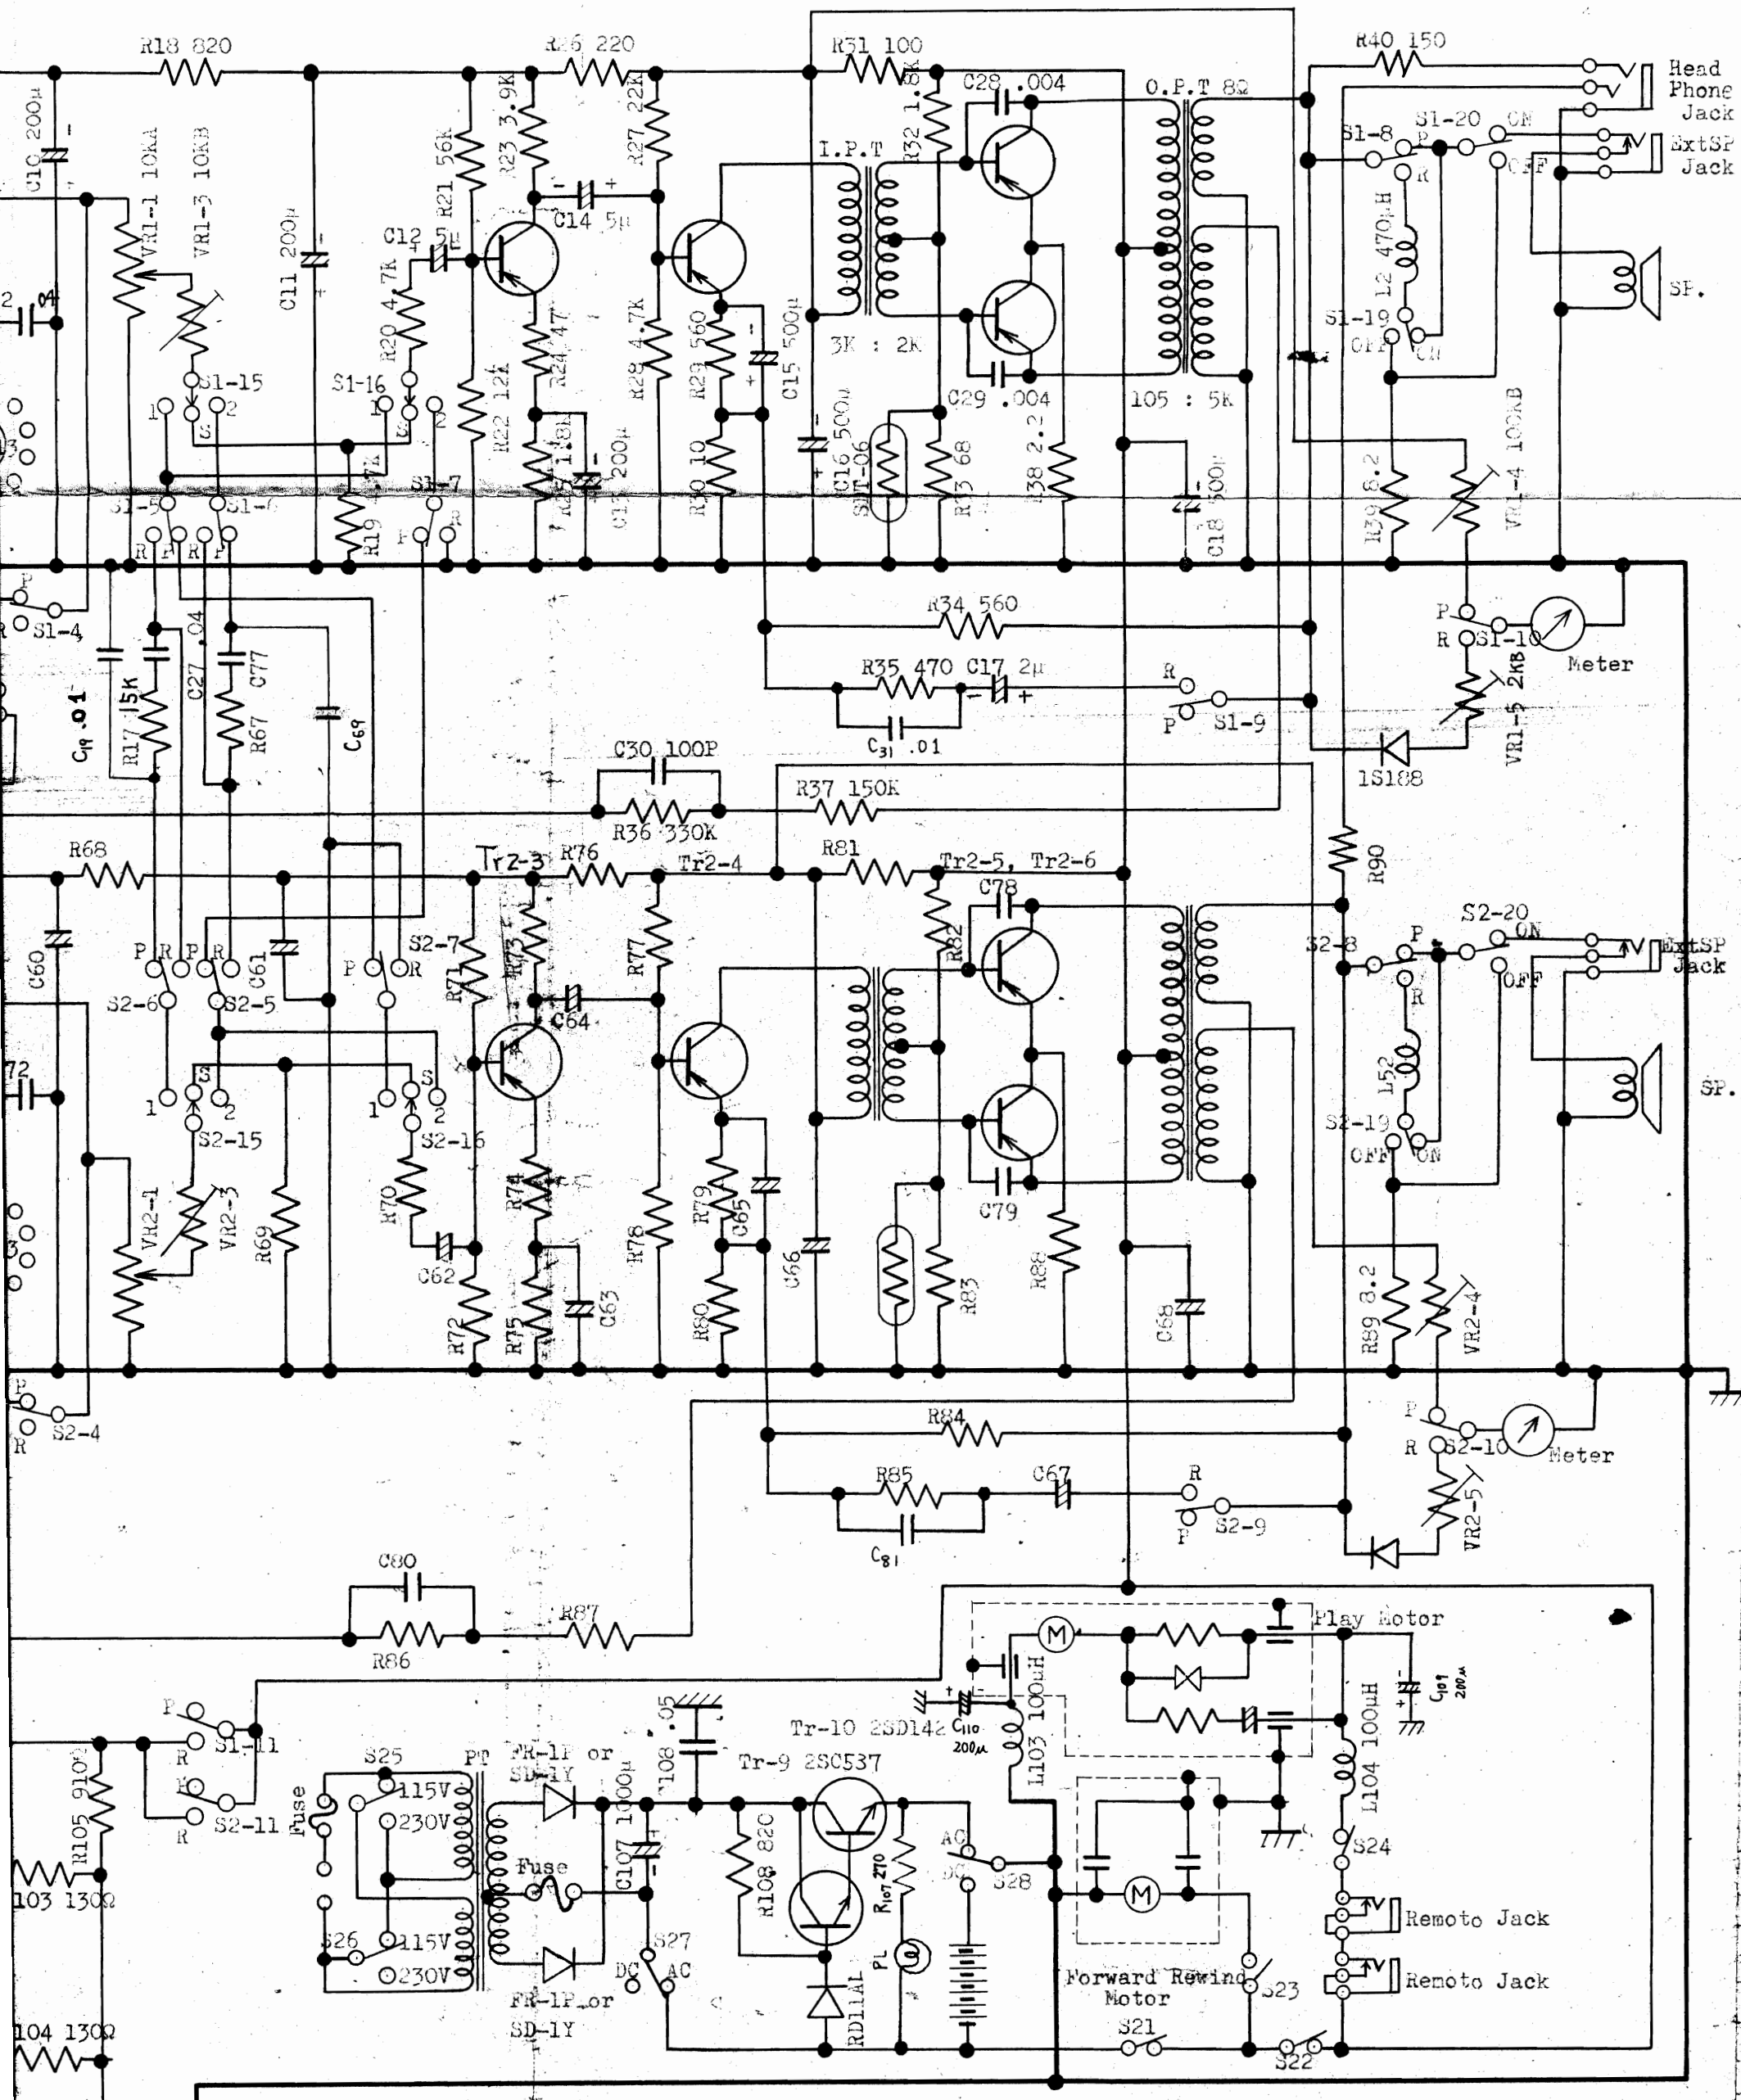

訂	ホ．．	指定なき寸法公差		—					
	二42.6.29 C_{19} C_{69} .0075 → .01に変 加筆	50以下	±						
	ハ42.3.23 C_{19} C_{67} 位置変更 C_{80} C_{90} 位置変更変更 R_{84} R_{85} 変更 C_{81} 追加	51以上	±	尺度	材質	員数	加工	照番	
正	ロ42.2.9 C_{19} C_{67} C_{77} C_{24} C_{76} 他, C_{22} C_{72} 変更 R_{17} R_{67} 変更		±	注意	図形を実測せぬこと	設計	41.11.30	製図	写図
	142.1.20 C_{24} C_{76} 他, C_{31} C_{81} 追加. R_{106} R_{107} 変更 SDT-06 他 加筆	角度	±		納品には品番.品名を明記のこと		加藤		

三洋電機株式会社ラジオ事業部

CIRCUIT DIAGRAM

	Tr1-4	Tr1-5, Tr1-6
-3	03P 2SB186B Y	2SB272Y x 2

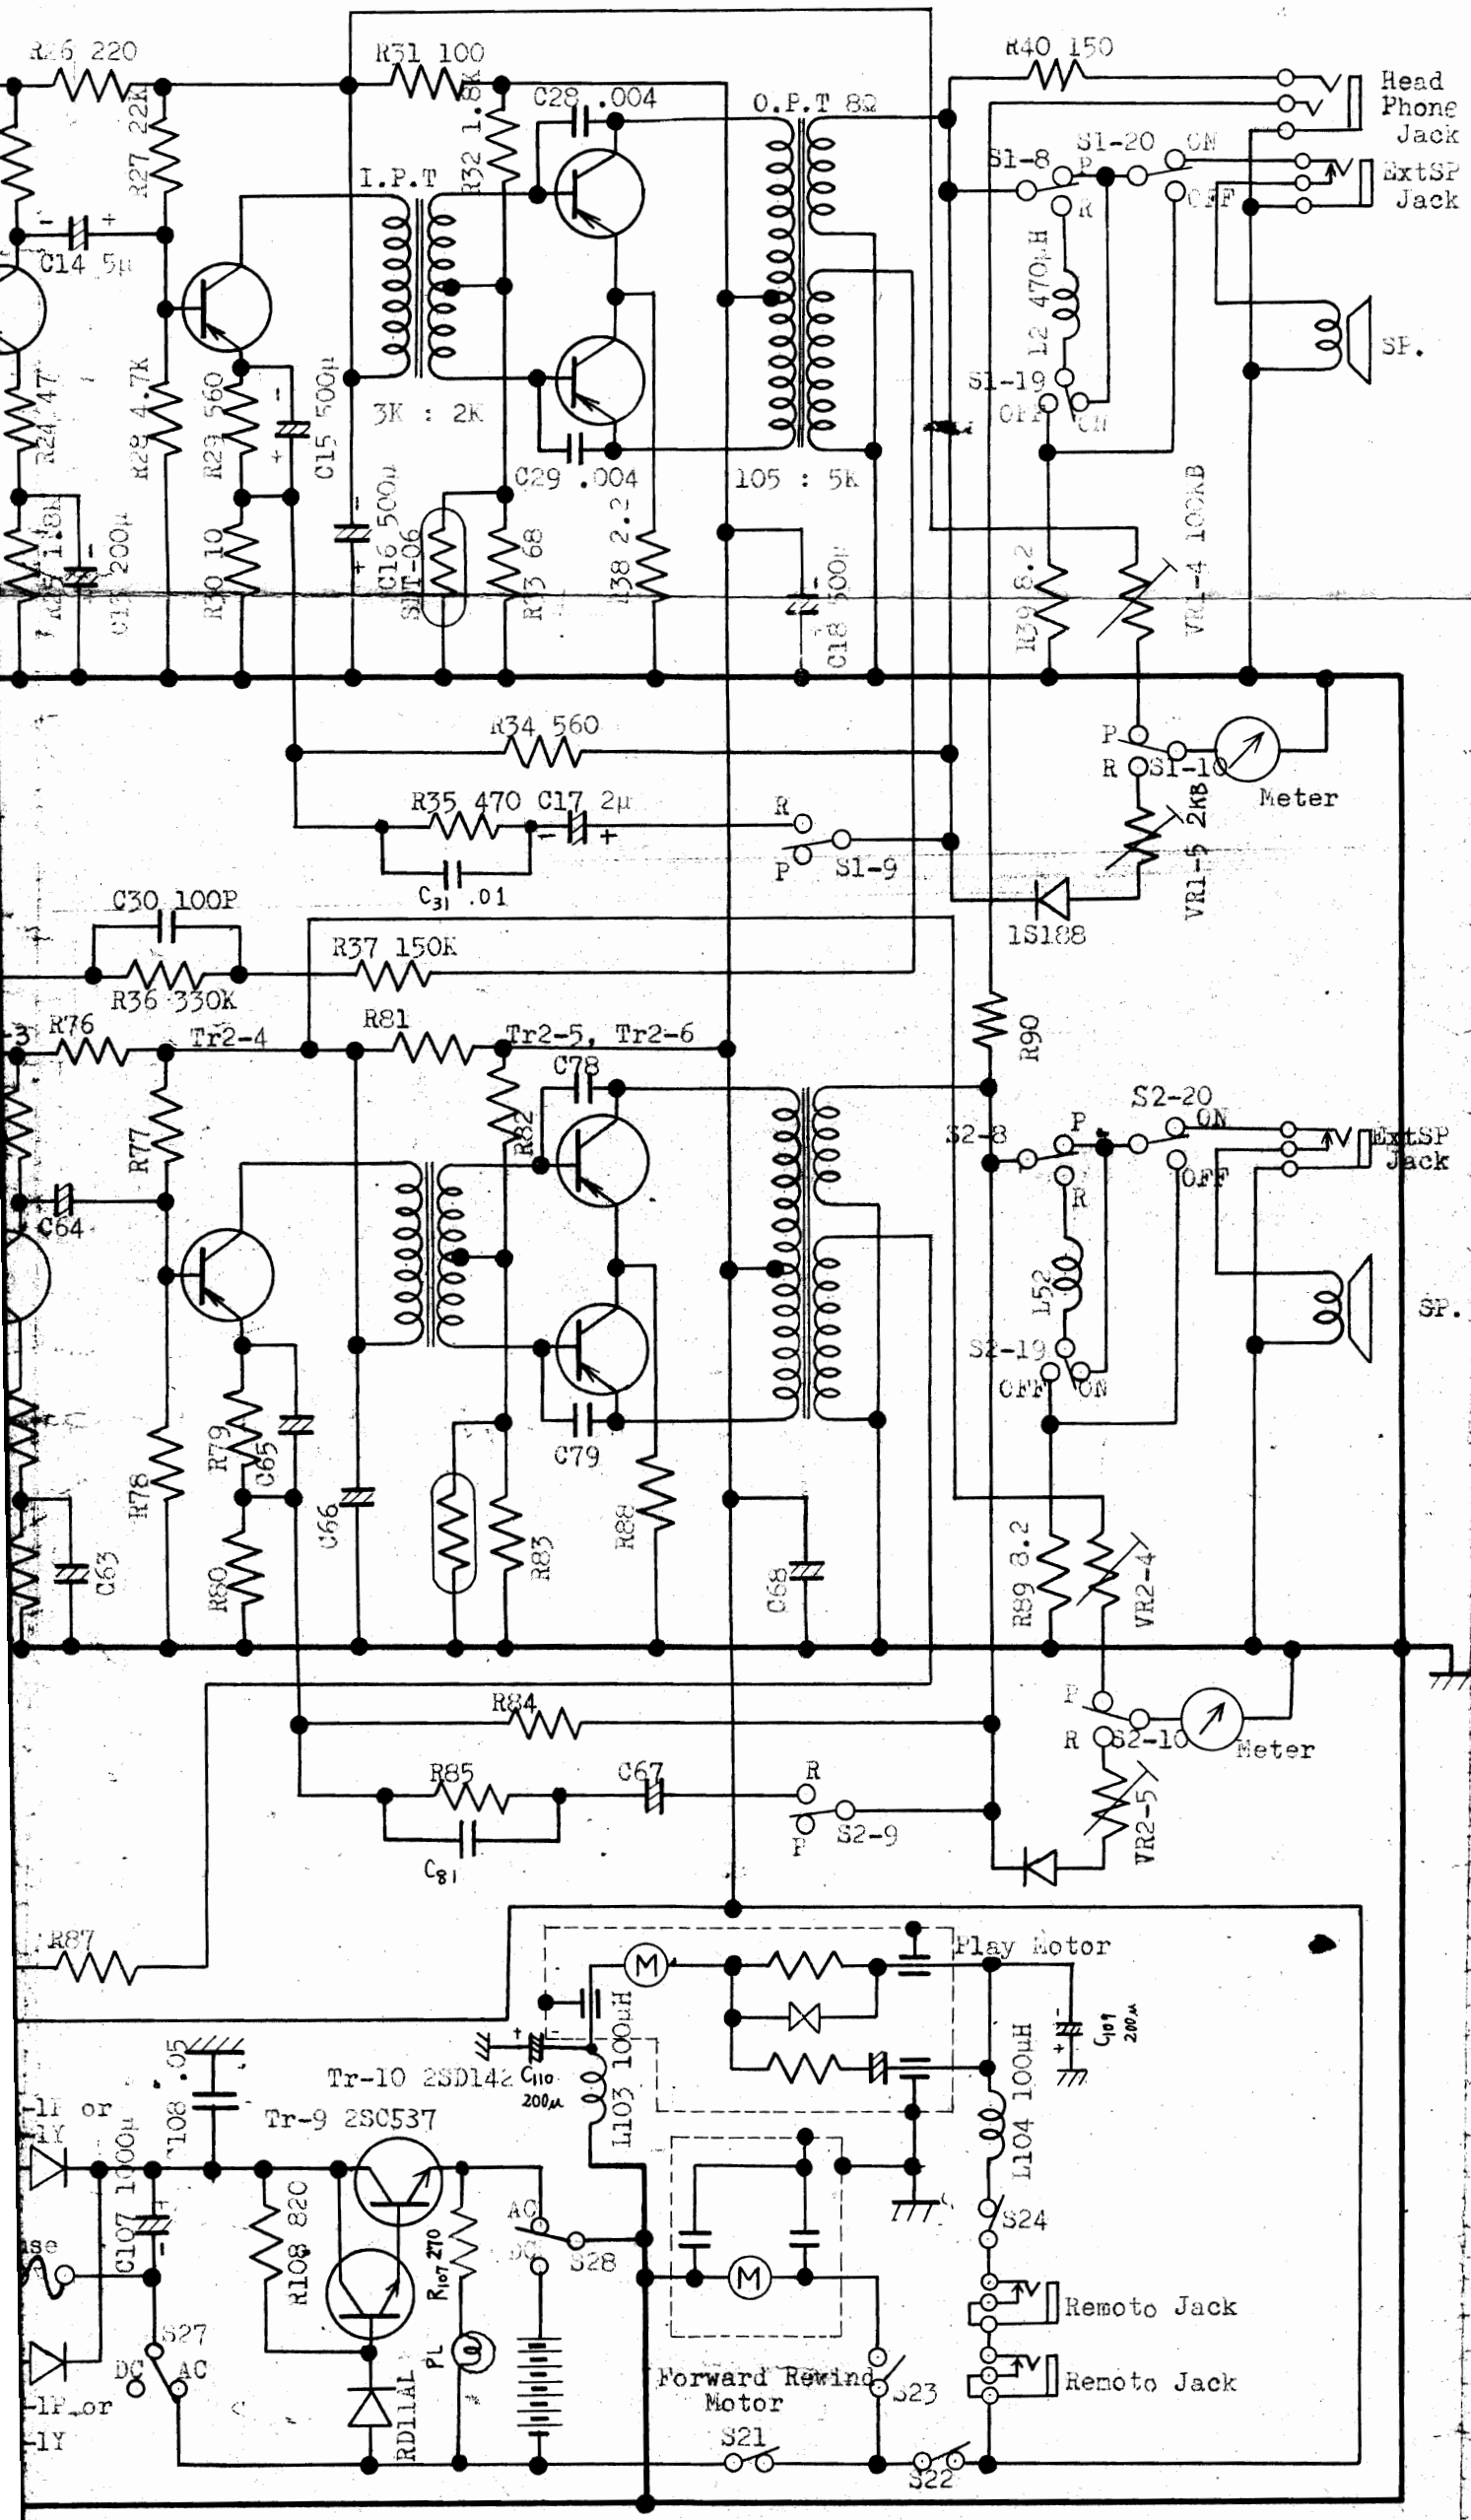

- S1-1 - S1-12 : Ch-1 Recording Sw (Play Position)
- S2-1 - S2-12 : Ch-2 Recording SW (Play Position)
- S1-13 S1-14 : Compensation SW (3-3/4 ips
  S2-13 S2-14 : Position)
- S1-15 S1-18 : Stereo Mode SW (Stereo
  S2-15 S2-18 Position)
- S1-19 S2-19 : Monitor ON-OFF SW (ON Position)
- S1-20 S2-20 : SP ON-OFF SW (Connected H.P. Jack) (ON Position)
- S21 : Tention Sw (ON at Tape set)
- S22 : DC Power SW (ON at Play)
- S23 : Forward Rewind SW (ON at F.R)
- S24 : Motor Stop SW (OFF at Pause)
- S25, S26 : AC Power Changing SW (115V Position)
- VR1-1 VR2-1 : Volume or Level Control
- VR1-2 VR2-2 : Tone Control
- VR1-3 VR2-3 : Gain Control
- VR1-4 VR2-4 : DC Voltage Control of Meter
- VR1-5 VR2-5 : Level Control of Meter

MR-1515

Sanyo 1239

訂正		指定なき寸法公差										
訂	ホ: .			—						MR - 1515		R —
正	ニ42.6.29 C19 C69 .0075→.01に変更 加筆	50以下	±	尺度	材質	員数	加工		照番	品名		品番
	ハ42.3.23 C19 C69 位置変更 C60 C70 位置変更 R44 R45 変更 C101 使用 C110 追加	51以上	±	注意	図形を実測せぬこと	設計	41.11.30	製図		写図	検印	図番 R09 — 94 —
	ロ42.2.9 C11 C81 C12 C24 C26 C74 他, C22 C92 変更 R17 R19 変更		±		納品には品番.品名を明記のこと		加筆済					
	142.1.20 C24 C74 中止, C21 C81 追加, R106 R107 変更 SDT-06 中止他 加筆済	角度	±									